

Present and future of the Rare-RI Ring Facility at RIBF*

T. Yamaguchi^{1†}  Y. Yamaguchi² 

¹Department of Physics, Saitama University, Saitama 338-8570, Japan

²RIKEN Nishina Center, Wako 351-0198, Japan

Abstract: An overview of the storage ring facility called Rare-RI Ring (R3) at the RI Beam Factory (RIBF), RIKEN is provided herein. The primary objective is obtaining precision atomic masses to understand astrophysical nucleosynthesis. The R3 is located downstream of the fragment separator BigRIPS in the OEDO-SHARAQ branch. Randomly produced radioactive ions are individually identified using auxiliary detectors at BigRIPS. Only a single ion of interest is injected into the R3 using the dedicated fast kicker system and ejected after thousands of revolutions in an event-by-event scheme. Revolution times under the isochronous ion-optical condition provide the mass-to-charge ratios of stored ions. Several commissioning campaigns, physics programs, and technical upgrades are summarized. In addition to mass measurements of exotic nuclei, future perspectives of new experimental opportunities are addressed.

Keywords: masses, storage rings, radioactive beams

DOI: 10.1088/1674-1137/adf1f5 **CSTR:** 32044.14.ChinesePhysicsC.49114003

I. INTRODUCTION

Storage rings have historically been built to accumulate ions of interest and increase their phase space densities for various high-energy physics experiments. Today, they have also been proven to be useful as experimental devices for radioactive ion beams [1]. The revolution frequencies of stored ions in a well-cooled or isochronous condition are proportional to their mass-to-charge ratios, enabling the direct mass measurements of exotic nuclei [2, 3, 4]. The fast technique can address even very short-lived species down to microseconds [5]. Owing to the characteristics of high energy beams, fully stripped or few-electron ions are available for an extended period where novel in-flight β - and γ -decay modes have been achieved, which cannot be observed with standard decay spectroscopies in the laboratory [6–8]. With a very thin gas target and beam recycling, low-energy astrophysical reaction studies have been performed at inverse kinematics [9, 10], which are still a challenge at normal kinematics with conventional setups. These unique features have extended traditional nuclear physics experiments and provided new knowledge of nuclear properties and dynamics. The advantages of storage rings for radioactive beams are addressed:

- Mass resolving power,

- Highly charged, or selected charge-state ions,
- Cooling techniques: electron, stochastic, and laser,
- Revolution for multiple use of (rare) ions,
- Long-time storage under ultra high vacuum (UHV),
- Accumulation to increase stored ion number,
- Many or single stored ions, bunched or coasting beams,
- Deceleration; fine beam control with RF,
- Higher-order tunable ion optics: standard and isochronous modes,
- Internal targets: gases and electrons,
- Dedicated detector setups: non-destructive Schottky pickup, thin foil time-of-flight (TOF) detector, UHV-compatible silicon detector telescope, etc.

Currently, operational storage rings for radioactive beams are the pioneering Experimental Storage Ring

Received 31 March 2025; Accepted 21 July 2025; Published online 22 July 2023

* The R3 project is supported by RIKEN Pioneering Project funding and partially by JSPS KAKENHI (25105506, 15H00830, 17K14311, 17H01123, 18H03695, 19K14751, 21H04461, 23K17686, and 23K25876)

† E-mail: yamaguti@mail.saitama-u.ac.jp

©2025 Chinese Physical Society and the Institute of High Energy Physics of the Chinese Academy of Sciences and the Institute of Modern Physics of the Chinese Academy of Sciences and IOP Publishing Ltd. All rights, including for text and data mining, AI training, and similar technologies, are reserved.

Table 1. Comparison of the three storage rings in the isochronous mode

	R3	ESR	CSRe
Circumference (m)	60.4	108.4	128.8
Max. rigidity (Tm)	6.5	10	8.4
Transition energy γ_t	1.2	1.4	1.4
Momentum acceptance (%)	± 0.5	± 0.3	± 0.33
Injected beam form	Individual	Bunched	Bunched
Particle identification	Separator/Revolution	Revolution	Revolution
Mass measurement mode	IMS	IMS(+SMS)	IMS
Mass correction method	Velocity/ $B\rho$	$B\rho$ tagging	Double TOF
IMS mass resolution (ppm)	~ 2.8 (σ)[23] ¹⁾	~ 1.1 (FWHM)[8]	~ 0.5 (σ)[4]
Lattice design	Edge focus	Strong focus	Strong focus
Cooling	—	Stochastic/Electron	Electron

(ESR) at GSI/FAIR in Darmstadt [11], the Experimental Cooler Storage Ring (CSRe) at IMP in Lanzhou [12], and the Rare-RI Ring (R3) at the RI Beam Factory (RIBF), RIKEN [13, 14]. Note that the ESR and CSRe are built at the synchrotron facilities, but the R3 is built at the cyclotron facility. Table 1 shows a comparison of the three storage rings in the isochronous mode, which is employed for the mass measurements of short-lived nuclei, called isochronous mass spectrometry (IMS). By contrast, cooling techniques are applied to the mass measurements of long-lived nuclei at the ESR, called Schottky mass spectrometry (SMS) [15].

Recently, the low-energy storage ring CRYRING (Swedish in-kind contribution to FAIR) has been commissioned at GSI/FAIR and is in operation as ESR@CRYRING for atomic and nuclear physics experiments [16]. CRYRING is also designed to store decelerated RI beams prepared at the fragment separator FRS [17]–ESR facility [18]. A dedicated reaction telescope setup has been installed [19].

II. CONCEPT AND UNIQUENESS OF R3

The Rare-RI Ring, as shown in Fig. 1, is directly connected to the fragment separator BigRIPS [20] in the OEDO-SHARAQ spectrometer branch [21]. The primary objective of the R3 is the IMS of exotic nuclei to contribute to the understanding of astrophysical nucleosynthesis. The precision of the relative mass value is required to be higher than 10^{-6} . Owing to the highest RI beam intensities at the RIBF, extremely neutron-rich nuclei along the r -process pathway are the target species to be measured. They are short-lived, and their production rates are very small, which indicates that cooling, long-time storage, and accumulation are no longer available. Therefore, the R3 concept involves selecting a single exotic ion among a

large amount of fission fragments and injecting and storing it in the ring through the fragment separator. Three unique points are addressed below. See also Table 1.

• Individual injection

For injecting an ion each time, a fast kicker system has been invented and routinely operated. Usually, the kicker response time ranges in microseconds at synchrotron facilities, whereas that at the R3 is faster by an order of magnitude. The kicker repetition rate can be increased to a maximum of 100 Hz. This individual injection scheme has an additional advantage, that is, the availability of event-by-event based information from auxiliary detectors at the fragment separator. This is in contrast to synchrotron-based facilities in which a beam is fast-extracted and is stored as a bunch.

• Lattice design

As shown in Fig. 1, the R3 has a cyclotron-like lattice structure for a wide momentum acceptance. Twenty-four dipole magnets are recycled from the cooler synchrotron TARN-II facility [22] and are arranged such that the R3 has six-fold symmetry with a sector forming four dipoles. No focusing magnet is included, but edge focusing is implemented in the R3. For the isochronous condition to be tuned precisely, 10 trim coils are embedded in the two dipoles outside in each sector; thus, a total of 10 adjustable parameters exist [14]. An isochronicity of $\delta T/T = 2.8 \times 10^{-6}$ (σ) has been currently achieved, where T denotes the revolution time [23]. By contrast, the ESR and CSRe have higher-order correction magnets for isochronous tuning, such as sextupole and octupole magnets.

• Velocity and magnetic rigidity corrections

Under the isochronous condition, the revolution times of stored ions are proportional to their mass-to-charge ra-

1) R3 uses the mass formula of Eq. (4) in Ref. [D. Nagae et al., Phys. Rev. C 110, 014310 (2024)] where mass resolution is nearly equal to isochronicity, $\delta T/T$.

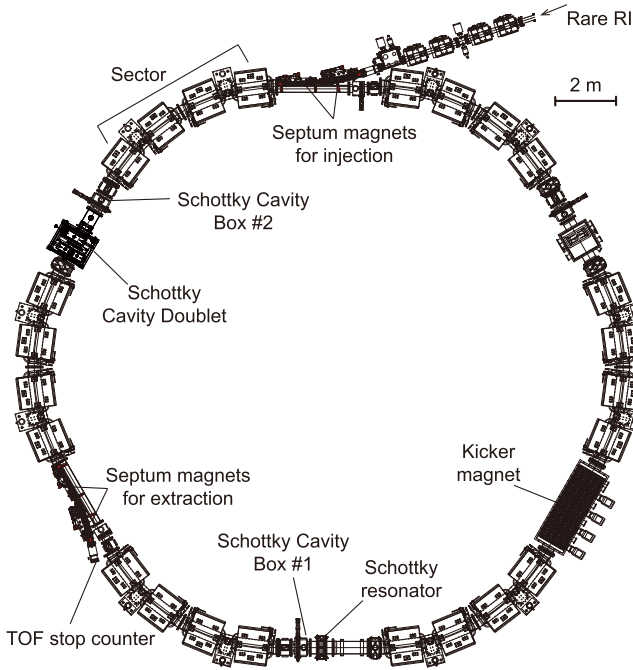


Fig. 1. Overview of the Rare-RI Ring

tios. However, this is true only for a reference ion with a particular m_0/Q . An ion of interest generally has a slightly different m/Q and does not exactly satisfy the isochronous condition. Therefore, velocity or magnetic rigidity $B\rho$ measurements are required to correct for the revolution times of ions of interest. Such corrections are straightforward at the R3, because the event-by-event based scheme provides the information of transverse and longitudinal emittances from auxiliary detectors installed at each focal plane of the beam line. As an alternative method, the $B\rho$ -tagging method was applied at the ESR, where a narrow slit at the dispersive focus of the fragment separator FRS properly defined the $B\rho$ values of stored ions, despite loss of statistics [24].

Recently, the CSRe established the $B\rho$ -defined IMS technique, which exploits two identical TOF detectors set up at a straight section to precisely determine the velocities of stored ions [25]. The mass precision has been significantly improved to an order of 10^{-7} or even better, which is now comparable to that of Penning trap experiments.

III. HISTORY AND ACHIEVEMENTS OF R3

The development history of the Rare-RI Ring is summarized in Table 2. The details of technical developments are available in a series of reports published in the RIKEN Accelerator Progress Report [26] and in STORI international conferences [27].

- Design study (~2011)

From approximately 10 years before the construction

Table 2. Summary of the R3 development history. MS indicates the machine study beam time.

Year	Development history
~2011	Design study (lattice design, kicker development)
2012–13	Construction period
2014	Offline tests with α source
2015	MS01 (^{78}Kr primary beam), MS02 (^{48}Ca fragments)
2016	MS03 (^{238}U fragments)
2017	MS04 (OEDO installed)
2018	Ni, Pd regions (1st run)
2020	MS05 (Kicker upgrade)
2021	Ni, Pd regions (2nd run)
2024	MS06 (Steering magnets installed)

phase, dedicated discussions and technical developments began [28–31]. One of the main discussions was the beam energy of the R3, which was 200 MeV/nucleon corresponding to $\gamma_t = 1.214$. For the individual injection scheme to be achieved, the kicker excitation should be synchronized with the particle arrival at the kicker position. Hence, the injection beam energy is limited, and a long injection beam line is required. Several concepts of beam line configuration and ring structure have been proposed [32]. For the ring magnets, the decision was made to recycle the TARN II magnets because of cost saving [22, 33]. Consequently, a weak-focusing cyclotron-like lattice structure was adopted, as shown in Fig. 1. The old magnets were carefully checked and restarted, and the stability and uniformity of the magnetic field presented challenges to achieving a mass precision of 10^{-6} [34, 35]. The invention of the fast kicker system for individual injection was crucial [36], and a new hybrid charging system was developed [37]. Based on the detailed simulations on the precise isochronous field and particle trajectories [38, 39], the final design of the facility was fixed in 2011 [40].

- Construction (2012–2013)

The construction started in April, 2012 [41] and was completed in March, 2013 [42, 43]. Dedicated infrastructures have been developed for the platform, crane system [44], power supply system [45], and magnet control system [46]. The dipole magnets were upgraded to implement trim coils to generate the precise isochronous field [47]. The quadrupole magnets after the SHARAQ to the R3 were provided from the 12 GeV KEK proton synchrotron. In parallel, the developments of thin TOF detectors [48–60], Schottky detector [61–64], and other unique detectors [65–71] have begun.

- Offline tests (2014)

Before beam commissioning, we confirmed the isochronous field using an α -source ^{241}Am [72]. A set of thin TOF and plastic scintillation detectors with the α -source in between was installed at a straight section. The one-turn TOF between two detectors was measured as a function of the field gradient produced by the trim coils, where the measured TOF width represents the degree of isochronism. The field gradient for the minimum width was consistent with that of the calculated isochronous field. The waveform of the kicker magnetic field was optimized to suppress disturbing reflected fields owing to small impedance mismatch [73]. The flat-top field for injection was obtained in 465 ns after trigger signal input. The facility status just before commissioning was reported at the ARIS [74] and STORI'14 conference [75–78].

• Commissioning, MS01 and MS02 (2015)

In 2015, we commenced two commissioning experiments [79]. First (MS01), we used a ^{78}Kr primary beam of 168 MeV/nucleon to confirm injection, circulation, and extraction using the developed kicker system [80–83]. A first-order isochronous field of ~ 10 ppm was successfully achieved and confirmed by TOF and Schottky measurements [84, 85], where the TOF was measured between the focal plane upstream of the R3 (SHARAQ target point) and the R3 exit. The revolution time of ^{78}Kr was obtained from the measured TOF (total storage time) divided by the turn number. The degree of isochronism from the analysis of TOF spectra was 1.9×10^{-5} . With the Schottky detector, a single ion of ^{78}Kr was observed in a time frame of 32 ms, and the frequency resolution was 1.3×10^{-6} at the full width at half maximum (FWHM) [86, 87]. The beam line optics was also confirmed [88, 89].

Second (MS02), we used ^{48}Ca projectile fragments. The secondary beams of ^{36}Ar and ^{35}Cl were in-flight identified and injected in the ring in the same manner as the commissioning with ^{78}Kr , where the revolution times were successfully obtained for the fragments [79]. The storage of secondary beams was also confirmed using the in-ring TOF detector [90].

• Commissioning, MS03 (2016)

In 2016, the first mass measurement of ^{238}U fission fragments was conducted [91, 92]. Five isotones, ^{79}As , ^{78}Ge , ^{77}Ge , ^{76}Zn , and ^{75}Cu , were used [93], whose masses were precisely known. The isochronous reference nucleus was ^{78}Ge of 175 MeV/nucleon, and an isochronism of 5 ppm was achieved [14, 94]. A TOF gate system has been developed to inject neutron-rich nuclei more efficiently [95]. The secondary beam production is synchronized with the cyclotron RF timing. The injection of abundantly produced nuclei close to stability can be suppressed by adjusting the RF signal timing as veto for the trigger logic. As an alternative to the in-ring TOF detect-

or, a monitor detector based on the δ -ray electron detection technique was developed to confirm particle storage [96, 97]. The mass determination procedure has been established with these data [98–100].

• Commissioning, MS04 (2017)

The OEDO system was installed in the injection beam line [101]. The injection beam optics was then recalculated, and the fourth commissioning beam time (MS04) was conducted in 2017 to optimize the transmission efficiency [102]. The emittance matching at the kicker position was considered to increase the transmission efficiency [103], resulting in an approximately 2% order of magnitude improvement. The degree of isochronism was further investigated and improved to 3.7 ppm [104]. The Schottky detector was also proven to be an appropriate monitor for tuning the isochronous condition [105].

• First mass measurement campaign (2018)

In 2018, mass measurements were performed at the neutron-rich Ni region [106] and the south-west region of ^{132}Sn [107, 108, 109]. In the former case, two $B\rho$ settings aimed at $^{74,76}\text{Ni}$ were employed. The results of Ni data will be published soon. In the latter case, two settings aimed at $^{123,124}\text{Pd}$ were employed. The isomeric state in ^{128}Sn was observed [110]. The analysis of the dataset, including ^{127}Sn , ^{126}In , ^{125}Cd , ^{124}Ag , and ^{123}Pd , was completed [111, 112], where ^{124}Ag was used for the mass reference. In this campaign, the particle selection technique with the TOF gate system was upgraded to include the ΔE gate system to further purify heavy ions of interest [113].

• Commissioning, MS05 (2020)

In the fifth commissioning (MS05) in 2020, the kicker system was further upgraded to make the magnetic waveform flat-top for extraction [114]. The output timing of the kicker subunits was properly adjusted such that the flat-top region covered one revolution time corresponding to approximately 400 ns. This is essential to efficiently extract the stored ion in a coasting mode after storage for 0.7 ms.

• Second mass measurement campaign (2021)

In 2021, a second mass measurement campaign was undertaken at the neutron-rich Ni region [115] and south-west region of ^{132}Sn [116] with this upgrade, to complement the data measured in the first campaign. However, owing to higher voltages applied to the kicker system, several capacitors in the pulse forming network were severely damaged [117]. During the COVID-19 pandemic, we repaired them to ensure the stable operation of the kicker system in the long term [118].

• Commissioning, MS06 (2024)

In the sixth commissioning (MS06) in 2024, the new kicker system operation was successfully confirmed using a ^{124}Xe primary beam with 155 MeV/nucleon [119]. In addition, new vertical steering magnets installed in the injection beam line improved the transmission efficiency by seven times. Note that the new Schottky detector system, the transverse Schottky cavity doublet from GSI and compact box-type cavities from Saitama, is now ready for operation. See Fig. 1.

IV. NEW EXPERIMENTAL OPPORTUNITIES

As of January 2025, three proposals have been approved by the RIBF program advisory committee, which involve technical developments and will create new opportunities of storage-ring nuclear physics experiments. The uniqueness of these proposals is addressed:

- Charge state separation using a thin foil for heavy neutron-rich nuclei:

The original concept of the experiment (NP2312-RI-RING08 [120]) was proposed from the international collaboration with GSI [121] based on the atomic charge exchange processes conducted at the FRS-ESR facility.

As the RI beam energies at the RIBF are intermediate at approximately 250 MeV/nucleon, the charge states of heavy RI beams are widely distributed around the most probable one depending on the velocity and atomic number of the ions. However, different charge states of the primary beam ^{238}U evolve after it passes through a production target. The magnetic rigidity of one of the distributed charge states of ^{238}U becomes very close to those of heavy neutron-rich nuclei to be measured, for example, neutron-rich lead isotopes. Subsequently, the intense background from the primary beam falls into the BigRIPS acceptance, preventing any experiment thus far.

The novel concept proposed here is the use of a charge stripper foil that is so thin that the charge state of an ion does not reach the equilibrium after passing through the foil. In such a case, a particular charge state can resonantly be transferred to others, the probability of which depends on the thickness of the foil material. The effect has been demonstrated through theoretical calculations with relativistic electron wave functions [122, 123]. The proposed technique will efficiently reduce the intensities of the large background from primary uranium, indicating that any species over the nuclear chart can be delivered as a secondary beam. Consequently, the present foil technique will be beneficial to various other applications as well as mass measurements at the R3.

- Transverse Schottky detector for stored single ions:

The resonant cavity-type Schottky detector for heavy ions was originally developed at GSI [124]. Compared with the existing capacitive-type pickups at the ESR, the

resonant Schottky detector has increased the signal-to-noise ratio by an order of magnitude, enabling fast measurements within a millisecond range [125].

Thus far, resonant Schottky detectors, often in a pill-box shape, have been used to measure the revolution frequencies of stored ions. Furthermore, position-sensitive Schottky detectors have already been developed in circular accelerators, where the dipole excitation of electromagnetic fields in the cavity could be utilized for a large number of stored electrons [126]. However, as the signal from the dipole mode is too small for single radioactive ions to detect with a desired precision, a new concept has been proposed: an elliptical cavity can provide a larger position-sensitive signal from the monopole mode for single ions. The elliptical cavity has a dedicated R_s/Q_0 map whose strength has a linear correlation to position, where R_s is the shunt impedance and Q_0 is the quality factor of the cavity. Therefore, the Schottky signal amplitude is proportional to the position where the ions pass through. The details of the transverse Schottky at the R3 are described in Refs. [127, 128] and the references therein. The test beam time of the transverse Schottky detector has been approved (NP2412-RIRING10 [129]).

With the present technique, magnetic rigidity $B\rho$ measurements at the R3 will be possible because the horizontal positions of stored ions linearly correlate to their magnetic rigidities through the dispersion function. A measurement of the revolution times and orbits of stored ions clarifies the dynamics of ion motion in the ring, improving the injection efficiency. This detector will enable direct $B\rho$ corrections for each stored ion, reducing reliance on BigRIPS data and potentially improving mass precision further, while also facilitating in-flight decay studies by tracking orbit shifts.

- In-flight isomer identification and filtering:

Isomeric states of radioactive nuclei have been studied using conventional γ -ray spectroscopy in stopped beam setups [130]. As storage rings have an excellent mass resolving power, the isomeric states produced in secondary beams are in-flight identified event-by-event through their mass-to-charge ratios [110]. This will create a new opportunity for isomer reaction studies. As the R3 is coupled with the BigRIPS fragment separator and SHARAQ spectrometer, the event-by-event analysis using all the detectors in the beam line can be performed for the isomeric and ground states separately. The R3 can even selectively extract the ion of interest from the ring after an appropriate storage to perform further applications, which will be useful for a new isomer filter system [119, 131]. Possible examples with isomeric beams will be the measurements of reaction cross sections (NP2412-RIRING09) [132], proton elastic scattering, and other direct reactions.

V. SUMMARY

A novel storage ring facility called the Rare-RI Ring, R3, has been constructed at the RIBF. The R3 features a single-ion event-by-event scheme at the cyclotron facility, where the fast kicker system for individual injection plays a major role. The cyclotron-like lattice structure with only dipole magnets provides a wide range of isochronicity. Over the past 10 years, a series of commissioning and physics runs has successfully been performed. The mass determination procedure has been confirmed using nuclei with known masses [100]. The mass

precision of ^{123}Pd has been improved, and consequently, the solar r -process abundance has been updated to be more consistent with observations [112]. Several technical upgrades have been completed [119], and new developments are being undertaken. New mass and lifetime measurement campaigns will begin soon.

ACKNOWLEDGEMENTS

The experiments at the R3 were performed at the RI Beam Factory operated by RIKEN Nishina Center and the CNS, The University of Tokyo.

References

- [1] M. Steck and Y. Litvinov, *Prog. Part. Nucl. Phys.* **115**, 103811 (2020)
- [2] T. Yamaguchi *et al.*, *Prog. Part. Nucl. Phys.* **120**, 103882 (2021)
- [3] X. Zhou *et al.*, *Nat. Phys.* **19**, 1091 (2023)
- [4] Y. Yu *et al.*, *Phys. Rev. Lett.* **133**, 222501 (2024)
- [5] B. Sun *et al.*, *Phys. Lett. B* **688**, 294 (2010)
- [6] G. Leckenby *et al.*, *Nature* **635**, 321 (2024)
- [7] R. Sidhu *et al.*, *Phys. Rev. Lett.* **133**, 232701 (2024)
- [8] D. Freire-Fernandez *et al.*, *Phys. Rev. Lett.* **133**, 022502 (2024)
- [9] J. Glorius *et al.*, *Phys. Rev. Lett.* **122**, 092701 (2019)
- [10] S. Dellmann *et al.*, *Phys. Rev. Lett.* **134**, 142701 (2025)
- [11] B. Franzke, *Nucl. Instrum. Methods Phys. Res. B* **24/25**, 18 (1987)
- [12] J. Xia *et al.*, *Nucl. Instrum. Methods Phys. Res. A* **488**, 11 (2002)
- [13] A. Ozawa *et al.*, *Prog. Theor. Exp. Phys.* **2012**, 03C009 (2012)
- [14] Y. Abe *et al.*, *Nucl. Instrum. Methods Phys. Res. A* **1072**, 170083 (2025)
- [15] B. Franzke *et al.*, *Mass Spectrom. Rev.* **27**, 428 (2008)
- [16] M. Lestinsky *et al.*, *Eur. Phys. J. Special Topics* **225**, 797 (2016)
- [17] H. Geissel *et al.*, *Nucl. Instrum. Methods Phys. Res. B* **70**, 286 (1992)
- [18] J. Glorius *et al.*, *Nucl. Instrum. Methods Phys. Res. B* **541**, 190 (2023)
- [19] C. Bruno *et al.*, *Nucl. Instrum. Methods Phys. Res. A* **1048**, 168007 (2023)
- [20] T. Kubo *et al.*, *Prog. Theor. Exp. Phys.* **2012**, 03C003 (2012)
- [21] T. Uesaka *et al.*, *Prog. Theor. Exp. Phys.* **2012**, 03C007 (2012)
- [22] T. Katayama *et al.*, *Particle Accelerators* **32**, 105 (1990)
- [23] S. Naimi *et al.*, *Eur. Phys. J. A* **59**, 90 (2023)
- [24] H. Geissel *et al.*, *Hyp. Int.* **173**, 49 (2006)
- [25] M. Wang *et al.*, *Phys. Rev. C* **106**, L051301 (2022)
- [26] RIKEN accelerator progress report <https://www.nishina.riken.jp/researcher/APR/indexe.html>.
- [27] STORI conference <https://indico.impcas.ac.cn/event/62/page/116-previous-stori-meetings>.
- [28] S. Nakajima *et al.*, *Acta Phys. Pol. B* **39**, 457 (2008)
- [29] Y. Yamaguchi *et al.*, *RIKEN Accel. Prog. Rep.* **40**, 148 (2007)
- [30] Y. Yamaguchi *et al.*, *Nucl. Instrum. Methods Phys. Res. B* **266**, 4575 (2008)
- [31] T. Yamaguchi *et al.*, *Int. J. Mass Spectrom.* **349-450**, 240 (2013)
- [32] Y. Yamaguchi *et al.*, *RIKEN Accel. Prog. Rep.* **41**, 137 (2008)
- [33] Y. Yamaguchi *et al.*, *RIKEN Accel. Prog. Rep.* **45**, 146 (2012)
- [34] Y. Yasuda *et al.*, *RIKEN Accel. Prog. Rep.* **41**, 141 (2008)
- [35] Y. Yasuda *et al.*, *RIKEN Accel. Prog. Rep.* **42**, 197 (2009)
- [36] Y. Yamaguchi *et al.*, *RIKEN Accel. Prog. Rep.* **44**, 157 (2011)
- [37] Y. Yamaguchi *et al.*, *RIKEN Accel. Prog. Rep.* **46**, 166 (2013)
- [38] Y. Yamaguchi *et al.*, *RIKEN Accel. Prog. Rep.* **43**, 184 (2010)
- [39] H. Suzuki *et al.*, *RIKEN Accel. Prog. Rep.* **43**, 186 (2010)
- [40] Y. Yamaguchi *et al.*, *RIKEN Accel. Prog. Rep.* **44**, 159 (2011)
- [41] Y. Yamaguchi *et al.*, *RIKEN Accel. Prog. Rep.* **46**, xiv (2013)
- [42] Y. Yamaguchi *et al.*, *RIKEN Accel. Prog. Rep.* **47**, 199 (2014)
- [43] Y. Yamaguchi *et al.*, *Nucl. Instrum. Methods Phys. Res. B* **317**, 629 (2013)
- [44] T. Fujinawa *et al.*, *RIKEN Accel. Prog. Rep.* **46**, 167 (2013)
- [45] T. Fujinawa *et al.*, *RIKEN Accel. Prog. Rep.* **46**, 168 (2013)
- [46] M. Komiyama *et al.*, *RIKEN Accel. Prog. Rep.* **47**, 202 (2014)
- [47] J. Ohnishi *et al.*, *RIKEN Accel. Prog. Rep.* **46**, 170 (2013)
- [48] D. Nagae *et al.*, *Nucl. Instrum. Methods Phys. Res. B* **317**, 640 (2013)
- [49] Y. Abe *et al.*, *RIKEN Accel. Prog. Rep.* **47**, 200 (2014)
- [50] S. Suzuki *et al.*, *Proceedings of Science* **2016**, 111 (2016)
- [51] Z. Ge *et al.*, *RIKEN Accel. Prog. Rep.* **50**, 187 (2017)
- [52] Z. Ge *et al.*, *RIKEN Accel. Prog. Rep.* **51**, 152 (2018)
- [53] H. Li *et al.*, *RIKEN Accel. Prog. Rep.* **51**, 153 (2018)
- [54] H. Li *et al.*, *JPS Conf. Proc.* **35**, 011025 (2021)
- [55] Z. Ge *et al.*, *JPS Conf. Proc.* **35**, 011023 (2021)
- [56] G. Hudson-Chang *et al.*, *RIKEN Accel. Prog. Rep.* **54**, 101 (2021)
- [57] S. Suzuki *et al.*, *Nucl. Instrum. Methods Phys. Res. A* **965**,

- 163807 (2020)
- [58] S. Naimi *et al.*, RIKEN Accel. Prog. Rep. **55**, 83 (2022)
- [59] S. Suzuki *et al.*, JPS Conf. Proc. **35**, 011017 (2021)
- [60] G. Hudson-Chang *et al.*, Nucl. Instrum. Methods Phys. Res. A **1069**, 169980 (2024)
- [61] F. Suzaki *et al.*, Nucl. Instrum. Methods Phys. Res. B **317**, 636 (2013)
- [62] F. Suzaki *et al.*, JPSJ Conf. Proc. **1**, 013058 (2014)
- [63] F. Suzaki *et al.*, JPS Conf. Proc. **6**, 030119 (2015)
- [64] F. Suzaki *et al.*, RIKEN Accel. Prog. Rep. **48**, 232 (2015)
- [65] S. Nakajima *et al.*, Nucl. Instrum. Methods Phys. Res. B **266**, 4621 (2008)
- [66] T. Yamaguchi *et al.*, Nucl. Instrum. Methods Phys. Res. B **317**, 697 (2013)
- [67] T. Yamaguchi *et al.*, Nucl. Instrum. Methods Phys. Res. A **766**, 123 (2014)
- [68] K. Inomata *et al.*, JPS Conf. Proc. **35**, 011020 (2021)
- [69] K. Inomata *et al.*, JPS Conf. Proc. **35**, 011021 (2021)
- [70] H. Arakawa *et al.*, JPS Conf. Proc. **35**, 011022 (2021)
- [71] K. Wakayama *et al.*, JPS Conf. Proc. **35**, 011024 (2021)
- [72] Y. Abe *et al.*, RIKEN Accel. Prog. Rep. **48**, 24 (2015)
- [73] Y. Yamaguchi *et al.*, RIKEN Accel. Prog. Rep. **48**, 231 (2015)
- [74] M. Wakasugi *et al.*, JPS Conf. Proc. **6**, 010020 (2015)
- [75] T. Yamaguchi *et al.*, Phys. Scr. **T166**, 014039 (2015)
- [76] Y. Yamaguchi *et al.*, Phys. Scr. **T166**, 014056 (2015)
- [77] Y. Abe *et al.*, Phys. Scr. **T166**, 014047 (2015)
- [78] F. Suzaki *et al.*, Phys. Scr. **T166**, 014059 (2015)
- [79] Y. Yamaguchi *et al.*, RIKEN Accel. Prog. Rep. **49**, 18 (2016)
- [80] H. Miura *et al.*, RIKEN Accel. Prog. Rep. **49**, 154 (2016)
- [81] Y. Yamaguchi *et al.*, Proceedings of the International Workshop on Beam Cooling and Related Topics (COOL'15), 182 (2016).
- [82] Y. Yamaguchi *et al.*, Proceedings of the 13th international conference on heavy ion accelerator technology (HIAT2015), 121 (2016).
- [83] H. Miura *et al.*, Proceedings of the 13th international conference on heavy ion accelerator technology (HIAT2015), 95 (2016).
- [84] Y. Abe *et al.*, RIKEN Accel. Prog. Rep. **49**, 19 (2016)
- [85] F. Suzaki *et al.*, RIKEN Accel. Prog. Rep. **49**, 179 (2016)
- [86] F. Suzaki *et al.*, RIKEN Accel. Prog. Rep. **50**, 184 (2017)
- [87] F. Suzaki *et al.*, Proceedings of the 13th international conference on heavy ion accelerator technology (HIAT2015), 98 (2016).
- [88] Z. Ge *et al.*, RIKEN Accel. Prog. Rep. **49**, 180 (2016)
- [89] Z. Ge *et al.*, Hyp. Int. **240**, 92 (2019)
- [90] D. Nagae *et al.*, RIKEN Accel. Prog. Rep. **49**, 181 (2016)
- [91] D. Nagae *et al.*, RIKEN Accel. Prog. Rep. **50**, 18 (2017)
- [92] S. Omika *et al.*, JPS Conf. Proc. **35**, 011026 (2021)
- [93] D. Nagae *et al.*, Nucl. Instrum. Methods Phys. Res. A **986**, 164713 (2021)
- [94] Y. Yamaguchi *et al.*, RIKEN Accel. Prog. Rep. **50**, 183 (2017)
- [95] Y. Abe *et al.*, RIKEN Accel. Prog. Rep. **50**, 186 (2017)
- [96] S. Omika *et al.*, RIKEN Accel. Prog. Rep. **50**, 185 (2017)
- [97] S. Omika *et al.*, Nucl. Instrum. Methods Phys. Res. B **463**, 241 (2020)
- [98] D. Nagae *et al.*, RIKEN Accel. Prog. Rep. **51**, 168 (2018)
- [99] D. Nagae *et al.*, JPS Conf. Proc. **35**, 011014 (2021)
- [100] D. Nagae *et al.*, Phys. Rev. C **110**, 014310 (2024)
- [101] S. Michimasa *et al.*, Prog. Theor. Exp. Phys. **2019**, 043D01 (2019)
- [102] Y. Yamaguchi *et al.*, RIKEN Accel. Prog. Rep. **51**, 165 (2018)
- [103] S. Naimi *et al.*, RIKEN Accel. Prog. Rep. **51**, 166 (2018)
- [104] Y. Abe *et al.*, RIKEN Accel. Prog. Rep. **51**, 167 (2018)
- [105] F. Suzaki *et al.*, RIKEN Accel. Prog. Rep. **52**, 51 (2019)
- [106] A. Ozawa *et al.*, RIKEN Accel. Prog. Rep. **52**, 5 (2019)
- [107] H. Li *et al.*, RIKEN Accel. Prog. Rep. **52**, 52 (2019)
- [108] S. Naimi *et al.*, RIKEN Accel. Prog. Rep. **52**, 102 (2019)
- [109] S. Naimi *et al.*, J. Phys. Conf. Series **1643**, 012058 (2020)
- [110] H. Li *et al.*, RIKEN Accel. Prog. Rep. **53**, 48 (2020)
- [111] H. Li *et al.*, RIKEN Accel. Prog. Rep. **56**, 30 (2023)
- [112] H. Li *et al.*, Phys. Rev. Lett. **128**, 152701 (2022)
- [113] Y. Abe *et al.*, RIKEN Accel. Prog. Rep. **52**, 15 (2019)
- [114] Y. Yamaguchi *et al.*, RIKEN Accel. Prog. Rep. **54**, 100 (2021)
- [115] A. Ozawa *et al.*, RIKEN Accel. Prog. Rep. **55**, 13 (2022)
- [116] S. Naimi *et al.*, RIKEN Accel. Prog. Rep. **55**, 14 (2022)
- [117] Y. Yamaguchi *et al.*, RIKEN Accel. Prog. Rep. **56**, S26 (2023)
- [118] Y. Yamaguchi *et al.*, RIKEN Accel. Prog. Rep. **57**, 109 (2024)
- [119] Y. Yamaguchi *et al.*, Proceedings of the 11th International Conference on Nuclear Physics at Storage Rings (STORI'24) (2024).
- [120] T. Yamaguchi and Y. Litvinov, Direct mass measurement of neutron rich Pb isotopes (2023), NP-PAC proposal.
- [121] Y. Litvinov, private communications (2019), R3 collaboration meeting.
- [122] I. Tolstikhina *et al.*, J. Exp. Theor. Phys. **119**, 1 (2014)
- [123] V. Shevelko *et al.*, J. Phys. B **37**, 201 (2004)
- [124] F. Nolden *et al.*, Nucl. Instrum. Methods Phys. Res. A **659**, 69 (2011)
- [125] S. Sanjari *et al.*, Rev. Sci. Instrum. **91**, 083303 (2020)
- [126] D. Bett *et al.*, Phys. Rev. Accel. Beams **25**, 022801 (2022)
- [127] S. Sanjari *et al.*, Proceedings of the 11th International Conference on Nuclear Physics at Storage Rings (STORI'24) (2024).
- [128] G. Hudson-Chang *et al.*, Proceedings of the 11th International Conference on Nuclear Physics at Storage Rings (STORI'24) (2024).
- [129] S. Sanjari *et al.*, Benchmarking the new schottky cavity doublet system of R3 heavy ion storage ring (2024), NP-PAC proposal.
- [130] P. Walker and Z. Podolyxak, Phys. Scr. **95**, 044001 (2020)
- [131] Y. Yamaguchi *et al.*, RIKEN Accel. Prog. Rep. **57**, 108 (2024)
- [132] T. Yamaguchi *et al.*, Studies on highly charged radioactive ions at the Rare-RI Ring facility (2024), NP-PAC proposal.